MAXHUB Ceiling Microphone

Model: CM30

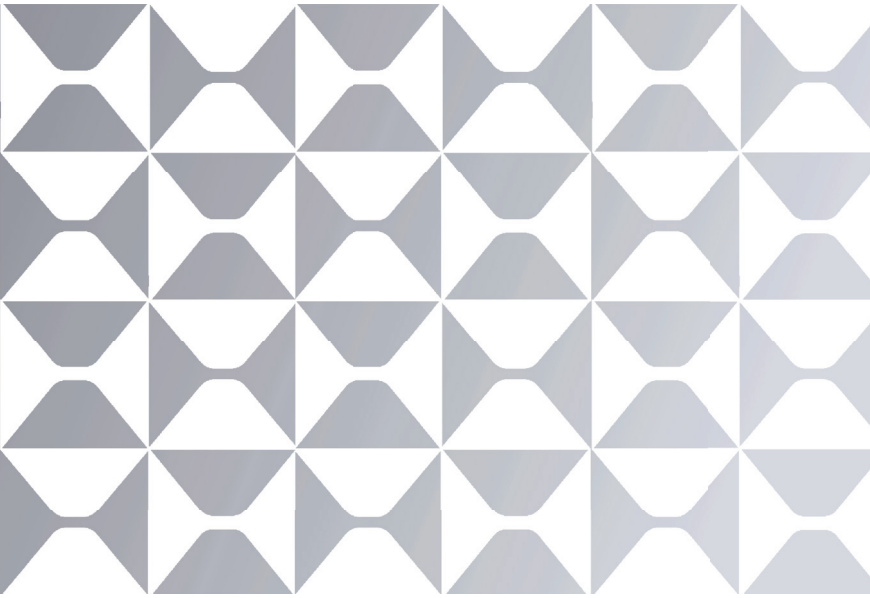

Quick Start Guide

V1.1

MAXHUB

Table of Contents

I. Package Contents 03

II. Product Introduction 03

III. Installation 04

Safety Instructions

Before operating this device, read and follow the instructions carefully to avoid dangerous or illegal operations.

1. Operating Environment

- Do not use the device in damp or humid locations to avoid internal circuit damage.
- Avoid hot environments or areas with direct sunlight.
- Optimal temperature range for use: 0-40°C, humidity range: 10%-90% RH.

2. Child Safety

The device and its parts may include small components. Keep them out of reach of children to prevent accidents.

4. Water Protection

This device is not waterproof. Keep the device dry.

5. Maintenance

- All maintenance should be carried out by qualified personnel.
- When there is damage to the equipment, do not privately dismantle the machine for maintenance. Please call customer service to report repair.
- Avoid inserting objects into any of the ports to prevent damage.
- Do not drop or subject it to strong impacts or vibrations to avoid product damage.

Special Statements

- Intellectual Property Rights: The hardware design and software of this product are protected by copyright law. Unauthorized copying of the manual or any part of the product will subject violators to legal consequences.
- This manual is for reference only. The final actual functions are subject to the functions of the product ordered and received by the customer.
- The images are for reference only. Please refer to the actual product. Our company reserves the right to improve and change the product's appearance and design without prior notice.

Disclaimer

The company is not responsible for any product damage, personal or property damage caused by the following situations (including but not limited to):

- Violating operation instructions (including but not limited to the User Manual, Quick Start Guide, etc.).
- Arbitrarily modifying the product structure.
- Using beyond the specified scope or conditions.
- Improperly handling the device.
- Insufficient inherent mechanical strength.
- Natural disasters and other irresistible factors.
- Improper use of methods.

WARNING

This product is only applicable to professionals with appropriate training for installation and operation. For the personal or property loss caused by private improper installation and operation, our company does not bear any responsibility.)

I. Package Contents

Please check the following contents included in the package:

1. CM30 Ceiling Microphone × 2
2. Suspension Rod Bracket × 2
3. Bracket Installation Parts × 2
4. Quick start guide × 1

II. Product Introduction

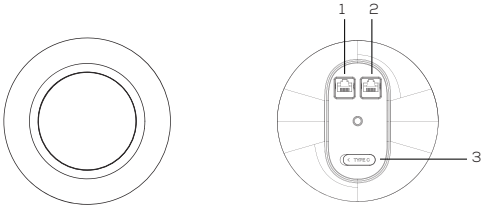

Front Rear

No.	Item	Function
1	DMIC 1	Power supply and data transfer (mixable)
2	DMIC 2	
3	Type C	For upgrading and parameterising

NOTE

To ensure the connection quality of the CM30 Ceiling Microphone, please consider the cable used:

- Please use standard network cables of Category 5 or above, with a length not exceeding 50 meters.
- Please use the power supply that complies with ES1 and PS2 or the limited power source.

III. Installation

Please ensure that the following materials and tools are included in the package before installation:

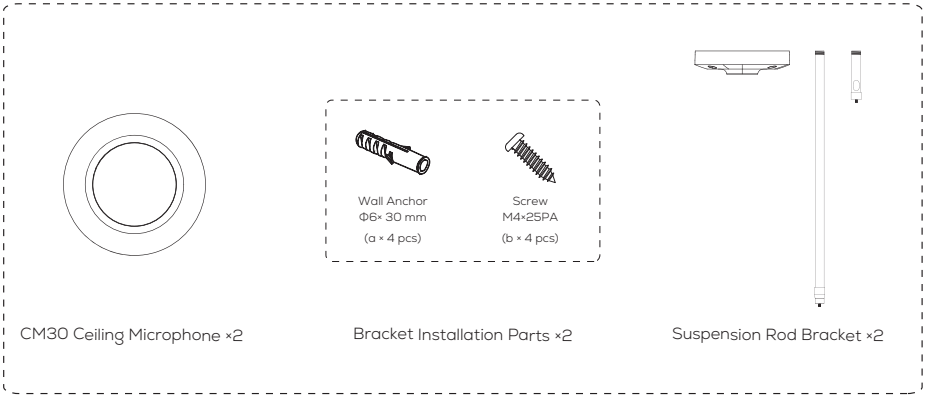

Then follow the steps below to install the CM30 Ceiling Microphone:

Step 1: Fix the bracket support onto the wall.

1) Pass the 2 network cables through the bracket.
2) Take 4 pcs of wall anchor a and insert them into the wall.
3) Use a screwdriver to fix the bracket onto the wall with 4 pcs of screw b (Recommended bit diameter: 6 mm).
4) Adjust the internal cables and tighten the screws above.

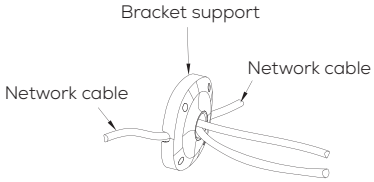



Step 2: Assemble the bracket, bracket support and registered jack as needed.

1) Regular Installation:

Pass the 2 network cables through the bracket support, telescopic brakcet in turn, and then connect the 2 network cables to the registered jack.

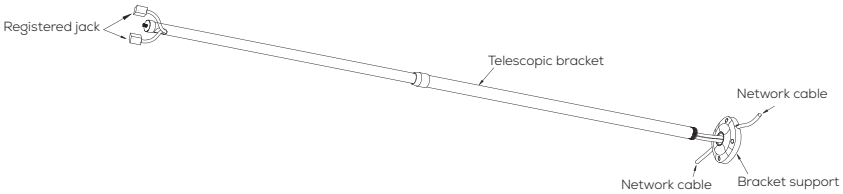

NOTE

- When installing, be careful to hold the end of the bracket to avoid exerting force on the sides of the bracket, which may cause it to deform or damage.
- The length of telescopic bracket can be adjusted as needed (Minumum: 750 mm, maximum: 1500 mm).

2) Ceiling Mounting:

Pass the 2 network cables through the bracket support, short brakcet in turn, and then connect the 2 network cables to the registered jack.

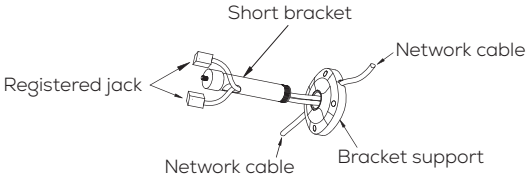

Step 3: Mount the microphone with the bracket.

1) Fix the CM30 Ceiling Microphone onto the bracket, and insert the network cable into the microphone port.

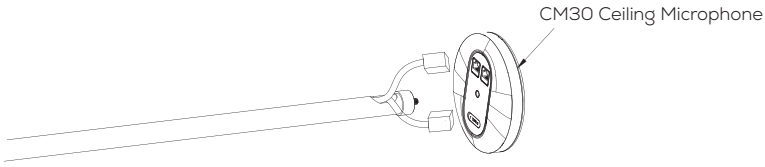

Step 4: The microphone lights up after power on.

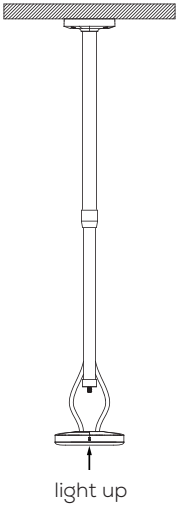

WARNING

Please do not climb, push, pull, or hit the entire device or metal rod with force to avoid causing accidental injury.

MAXHUB

