
INSTRUCTION MANUAL

DYNAMIC MICROPHONE DM-1100

1. GENERAL DESCRIPTION


The TOA DM-1100 is a unidirectional microphone suited for hand-held, general-use applications. This microphone body is rigidly constructed of die-cast zinc, and designed to reduce switching and handling noises.

2. APPEARANCE

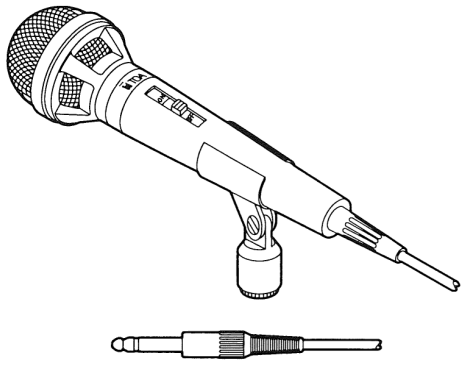

Phone plug

3. CIRCUIT DIAGRAM

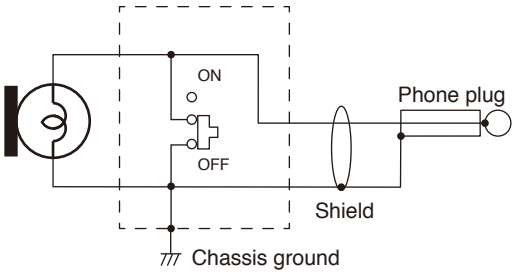

4. SPECIFICATIONS

Model	DM-1100
Type	Moving coil microphone
Directivity	Unidirectional
Rated Impedance	600 Ω, unbalanced
Rated Sensitivity	–55 dB (1 kHz, 0 dB=1 V/Pa)
Frequency Response	100 Hz to 12 kHz
Connection Cable	Single-core shielded cable
Cable Length	7.5 m or 24.6 ft
Terminal of Cable	Phone plug
Weight	210 g or 0.46 lb (without connection cable)
Dimensions	ø 55 x 178 mm or ø 2.2 x 7.0 in (microphone body)
Talk Switch	Short-off, slide switch
Finish	Body: Die-cast zinc, black Head: ABS resin/zinc-plated steel wire, black
Accessory	Microphone holder (W5/16", W5/8")

Note: The design and specifications are subject to change without notice for improvement.

https://www.toa-global.com/en

TOA Corporation

133-04-00008-02