WALL FLUSH-MOUNT SPEAKER PC-391T


DSCRIPTION


The PC-391T is a small flush-mount wall speaker. Its ideal applications include hotel and hospital rooms, and reception counters in the banks and clinics.

SPECIFICATIONS


Rated Input	3 W
Rated Impedance	3.3 kΩ
Sound Pressure Level	86 dB (1 W, 1 m)
Frequency Response	150 Hz – 18 kHz
Speaker Component	7.7 cm cone-type speaker
Attenuation	0 (OFF), 1 (–12 dB), 2 (–6 dB), 3 (0 dB)
Finish	Baffle: Stainless steel Grille: Aluminum, silver
Dimensions	162 (W) × 115 (H) × 47 (D) mm (excluding the projection parts such as a switch knob)
Weight	600 g
Accessory	Switch box mounting screw ·····4, Speaker mounting screw ·····4, Wood screw ·····4

APPEARANCE

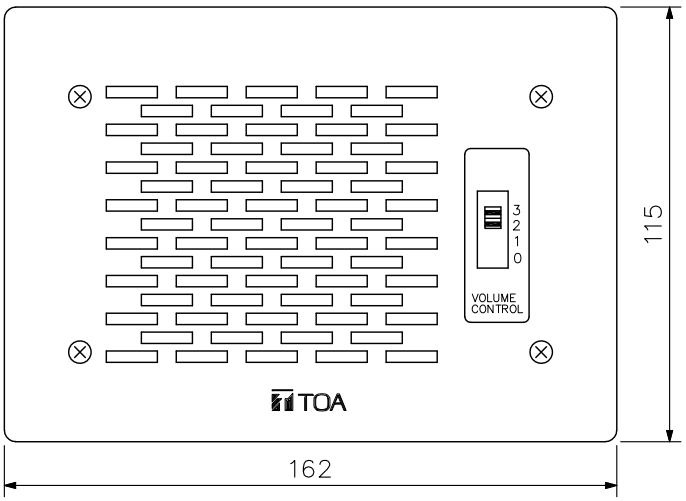


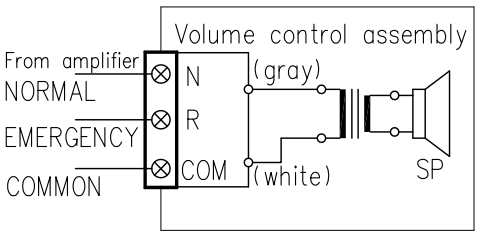


Wiring diagram for a 3-wire system with emergency broadcast

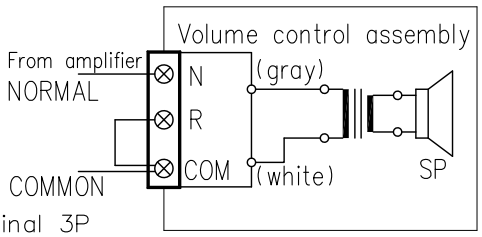

2-wire system wiring diagram

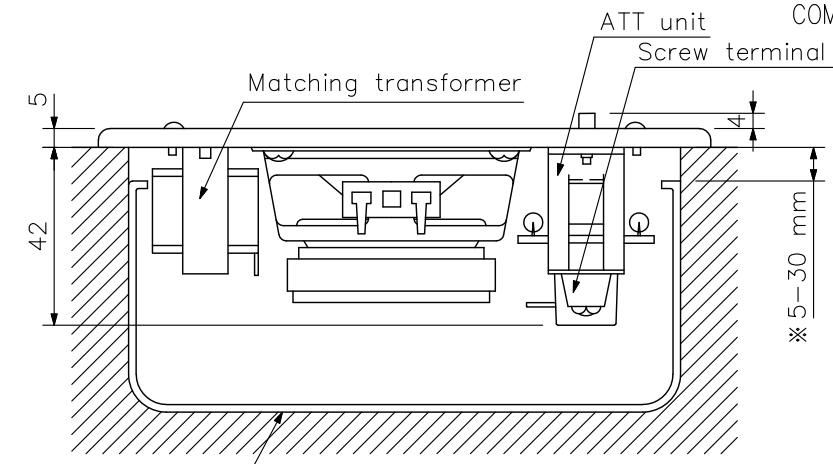

※ When mounting in the optional in-wall back box (YC-150(E), etc.), the box mounting surface should be 5–30 mm away from the wall surface.

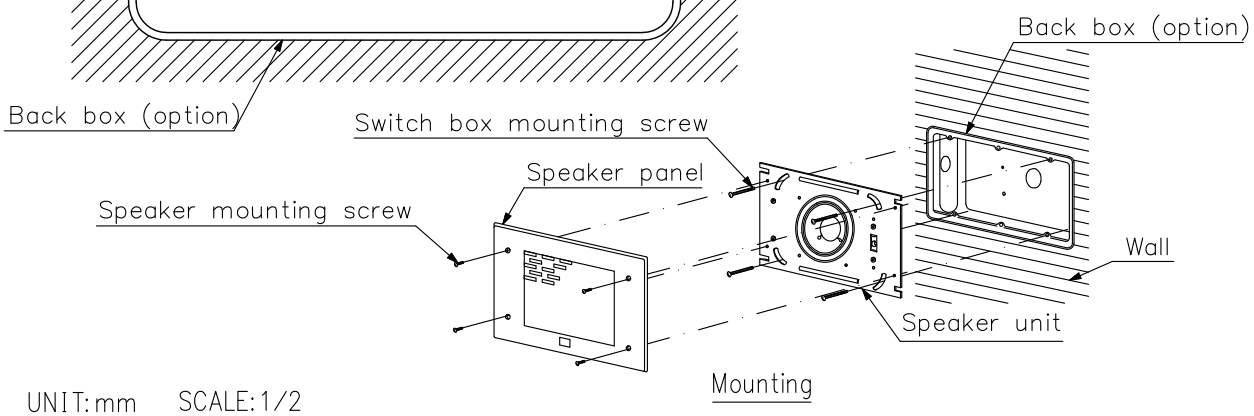

Mounting

UNIT: mm SCALE: 1/2

TOA Corporation

DWG No: GPC00UA1-5