TOA

MICROPHONE

PM-222U


DESCRIPTION


The PM-222U is a close-talking microphone for making general announcements. It comes with a talk switch that can be locked. It is provided with the function to remotely control both the amplifier power and chime operation.

SPECIFICATIONS

Type	Moving coil microphone
Directivity	Unidirectional
Rated Impedance	600 Ω, balanced
Rated Sensitivity	−47 dB (1 kHz 0 dB = 1 V/Pa)
Frequency Response	100 Hz – 10 kHz
Cable	2-core shielded plus 2-core cable
Cable Length	2 m (when extended)
Terminal	No connector
Talk Switch	Short-off type with lock
Remote Switch	Make contact (linked with talk switch) 30 V DC, 500 mA or less
Finish	ABS resin, gray
Dimensions	44 (W) × 160 (H) × 38 (D) mm
Weight	200 g
Accessory	Microphone holder……1, Metal fitting……1, Tapping screw4×16……2

APPEARANCE

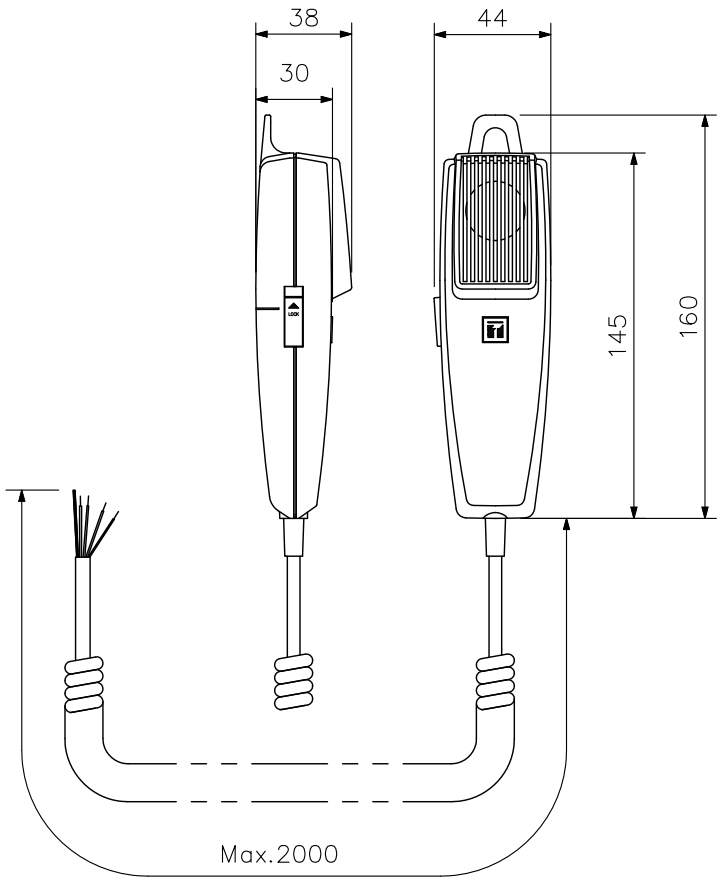

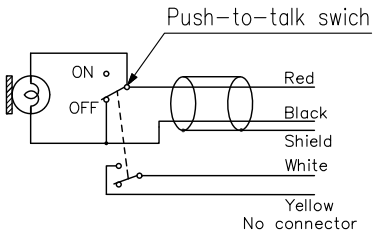

Circuit Diagram

UNIT: mm SCALE: 1/3

TOA Corporation

DWG No: GPM00DA1-4